

Last modified: 28/08/2020 11:58:42

# Module - TPMS - Continental (Remove and Replace)

Correction Code 34043002

## Removal

1. Remove RH rear seat bolster (refer to procedure).
2. Remove the 2nd row seat cushion (refer to procedure).
3. Release the lower section of the RH sill panel to access the TPMS ECU.




### CAUTION

Do not remove the entire trim panel.



- 1 Location of TPMS ECU.

4. Release the harness from the base of the TPMS ECU.

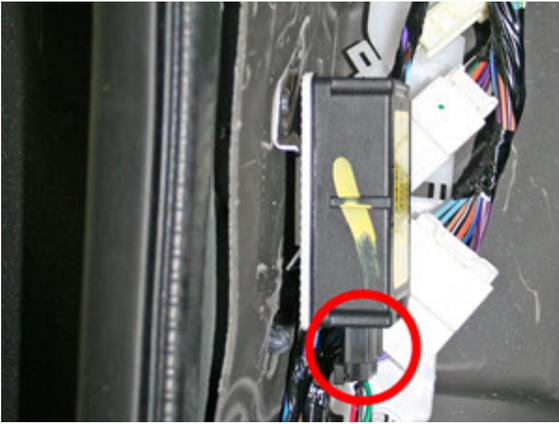

5. Slide the ECU downwards to remove it from the metal bracket.

## Installation

Installation procedure is the reverse of removal, except for the following:



### CAUTION

Replace any broken clips.

- Reinstall the latest vehicle firmware, or update the firmware if not the latest. See [Software Reinstall](#) or [Firmware Update](#).
- In the Toolbox "TPMS Setup" panel, select "Learn TPMS Sensor IDs" and press the Play button. ([refer to procedure](#)).
- Perform a road test.