
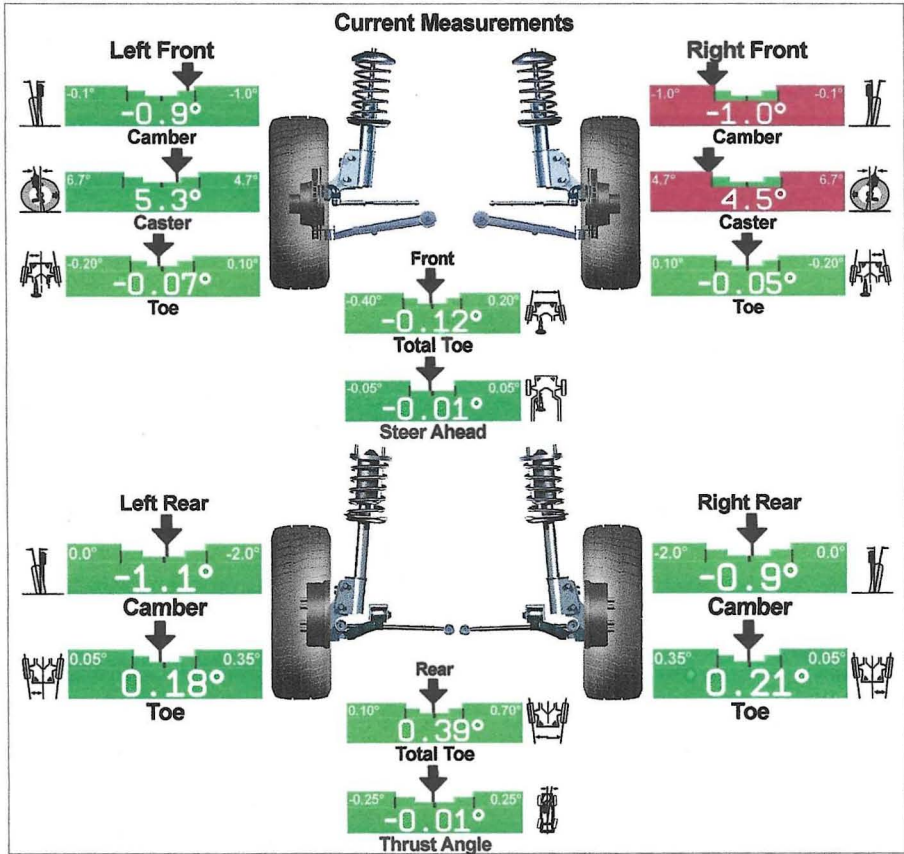


Tesla : Model Y : Dual Motor All Wheel Drive : Coil Suspension (with 19", 20" Wheel) : Ballasted
Specification (Preferred)
ExpressAlign Total Alignment

With
3004
BALLAST

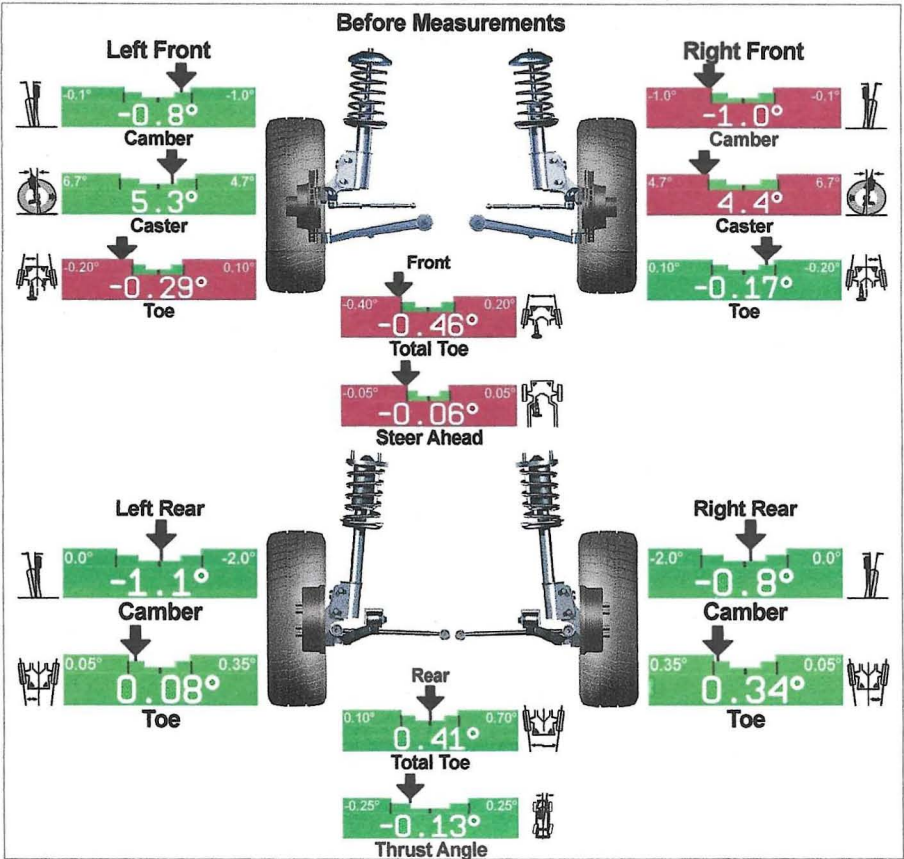

• One or more values are not within specification. Tire wear, handling and safety problems may result.

Front : Left

Actual	Before	Specified Range
-0.9°	-0.8°	-1.0° -0.1°
5.3°	5.3°	4.7° 6.7°
-0.07°	-0.29°*	-0.20° 0.10°
11.2°	11.1°	
10.3°	10.2°	

Camber
Caster
Toe
SAI
Included Angle
Turning Angle Diff.

Front : Right

Actual	Before	Specified Range
-1.0°*	-1.0°*	-1.0° -0.1°
4.5°*	4.4°*	4.7° 6.7°
-0.05°	-0.17°	-0.20° 0.10°
11.1°	11.1°	
10.1°	10.1°	

Front

Cross Camber
Cross Caster
Cross SAI
Total Toe
Cross Turn Diff.

Actual	Before	Specified Range
0.2°	0.2°	-0.6° 0.6°
0.8°	0.9°	-1.0° 1.0°
0.0°	-0.1°	
-0.12°	-0.46°*	-0.40° 0.20°

Rear : Left

Actual	Before	Specified Range
-1.1°	-1.1°	-2.0° 0.0°
0.18°	0.08°	0.05° 0.35°

Camber
Toe

Rear : Right

Actual	Before	Specified Range
-0.9°	-0.8°	-2.0° 0.0°
0.21°	0.34°	0.05° 0.35°

Rear

Cross Camber
Total Toe
Thrust Angle
Axle Offset

Actual	Before	Specified Range
-0.1°	-0.2°	-0.8° 0.8°
0.38°	0.41°	0.10° 0.70°
-0.01°	-0.13°	-0.25° 0.25°
0.0in	0.0in	

WITH 300#
Ballast.